


HD17VXE

Mini Excavator




SPECIFICATIONS

■ Dimensions (Units mm)

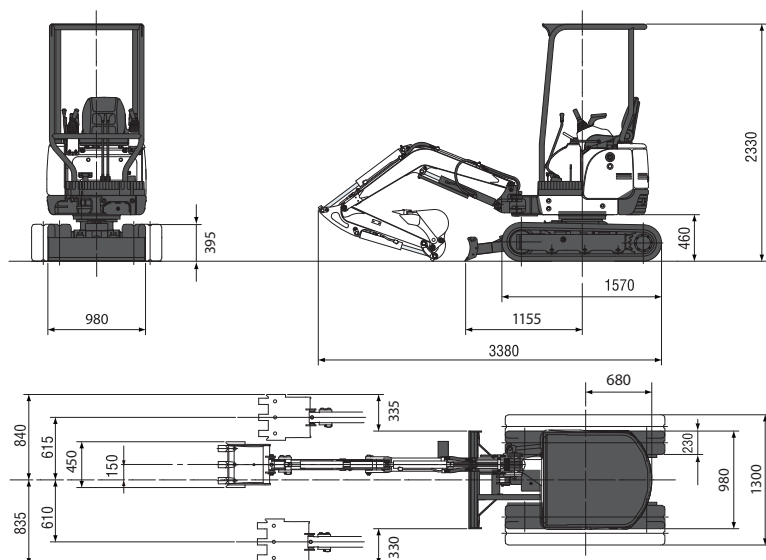

■ Working Range (Units mm)

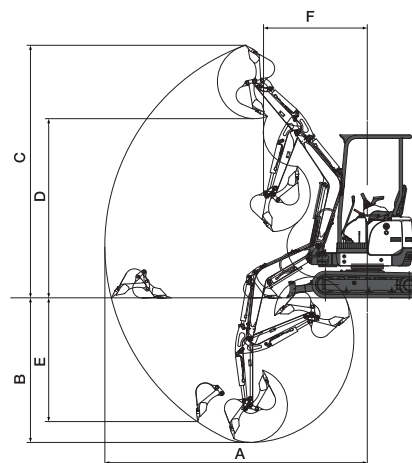

STANDARD

- 4 post ROPS canopy
- Expanding Tracks
- Flashing light
- Extra counter weight
- Auxiliary piping

OPTIONS

- Short dipper arm
- Less counter weight

4-Post canopy	Standard	Option (short arm)
A. Max. digging radius	3990	3760
B. Max. digging depth	2350	2100
C. Max. digging height	3810	3610
D. Max. dumping height	2760	2560
E. Max. vertical digging depth	2010	1770
F. Min. front turning radius	1580	1490
At right boom swing	1340	1280

Performance		Boom swing system	
Bucket capacity	0.037m ³	Type	Boom offset with hydraulic cylinder
Bucket width (Standard)	450mm	Swing angle (L/R)	55°/80°
Operating weight: 4-Post ROPS	1690kg	Hydraulic system	
Swing speed	9.4min ⁻¹	Pressure	20.6 Pa (210kgf/cm ²), 18.1 Pa (185kgf/cm ²)
Travel speed (low/high)	2.1/4.0km/h	Pump hydraulic flow	17.2L/min x2 + 12L/min
Gradeability	58%(30°)	Dozer blade	
Ground pressure	25.6kPa (0.26kgf/cm ²)	Size (WxH)	980/1300mm x 235mm
Max bucket digging force	15.7kN (1600kgf)	Lift above ground / Drop below ground	230mm/340mm
Engine		Max auxiliary flow	
Model	YANMAR 3TNV70	Auxiliary line	29.2L/min
Rated output	10.5kW/2300min ⁻¹ (14.2Hp/2300 rpm)		
Fuel tank capacity	20L		

Product Range:



HD12VXE



HD19VXT



HD25V5

PARTS AND SERVICE

We are proud of the back-up service we offer to customers. The importance of stocking genuine spare parts for all the equipment we supply is a high company priority.



Auckland, Head Office
6-10 Parkway Drive,
Mairangi Bay,
Auckland
(+64) 09 443 2436
sales@yrco.co.nz

Auckland, Mt Wellington
20L Sylvia Park Road,
Mt Wellington,
Auckland
(+64) 09 553 5470
salesmtwell@yrco.co.nz

Waikato
3/31 Chafer Place,
Te Rapa,
Hamilton
(+64) 07 595 0245
saleswaikato@yrco.co.nz

Wellington
8 Broken Hill Road,
Porirua,
Wellington
(+64) 04 212 2456
saleswell@yrco.co.nz

Christchurch
20 Nga Mahi Road,
Sockburn,
Christchurch
(+64) 03 341 6923
saleschch@yrco.co.nz

